




P O Box 139, Chatswood
NSW 2067, Australia
Tel: +61 (0)2 9412 2288
Fax: +61 (0)2 9412 2233
www.unipage.com.au
sales@unipage.com.au

IQ CHARGER

INSTRUCTIONAL MANUAL



INSTRUCTION for IQ Charger Base

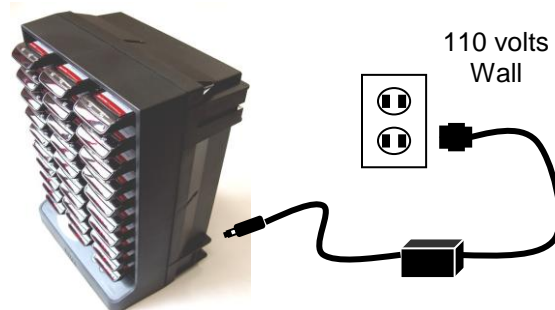

1. To Set the Number Range

- To enter pager number setting mode, press and hold the **“Setup”** button for 8 seconds until the charger beeps.



- Press **“Prog (↓)”** or **“Setup (↑)”** buttons to change the range.
- Wait for 5 seconds until the charger beeps. **“SAVE”** will show on the display.
- Press and hold **“Prog”** and **“Setup”** buttons for 3 seconds to confirm.
- **“END”** will show on the display.

2. To Program Pagers

- To enter pager number programming mode, press and hold the **“Prog”** button for 8 seconds until the charger beeps.
- **“Wrt”** will shortly show on the display.



P O Box 139, Chatswood
NSW 2067, Australia
Tel: +61 (0)2 9412 2288
Fax: +61 (0)2 9412 2233
www.unipage.com.au
sales@unipage.com.au

- Press and hold "**Prog**" button for 3 seconds to confirm.

3. To Read Born On Date and Base ID

- Press and Hold the "**Prog**" and "**Setup**" buttons for 8 seconds.
- Display will show "**dATE**".
- Press "**Preg**" button to show the manufacturing date for all pagers. (Ex: "048" means the pager is manufactured on April, 2008)
- Press "**Setup**" button to change "**dATE**" to "**Id**".
- Press "**Preg**" button to show the Base ID programmed on the pagers.

4. To Set and Program the Base ID

- Plug the power code while pressing and holding the "**Prog**" and "**Setup**" buttons until the charger beeps twice.
- Display will show current base ID. (Ex: Base Id : 070, then "b070" will show on display).
- Press and hold the "**Setup**" button for 3 seconds and change the Base ID number by pressing the up and down arrow key.
- Wait for 5 seconds to save it.
- Again, press and hold the "**Prog**" button for 3 seconds to be ready for programming.
- Display will show "**Bwr**".
- Press "**Prog**" button for 2 seconds to start programming the Base ID
- Display will show "**End**" when finished.